


18/30 kV XLPE INSULATED STEEL WIRE ARMOURED THREE-CORE CABLES WITH COPPER CONDUCTOR

According to IEC 60502-2

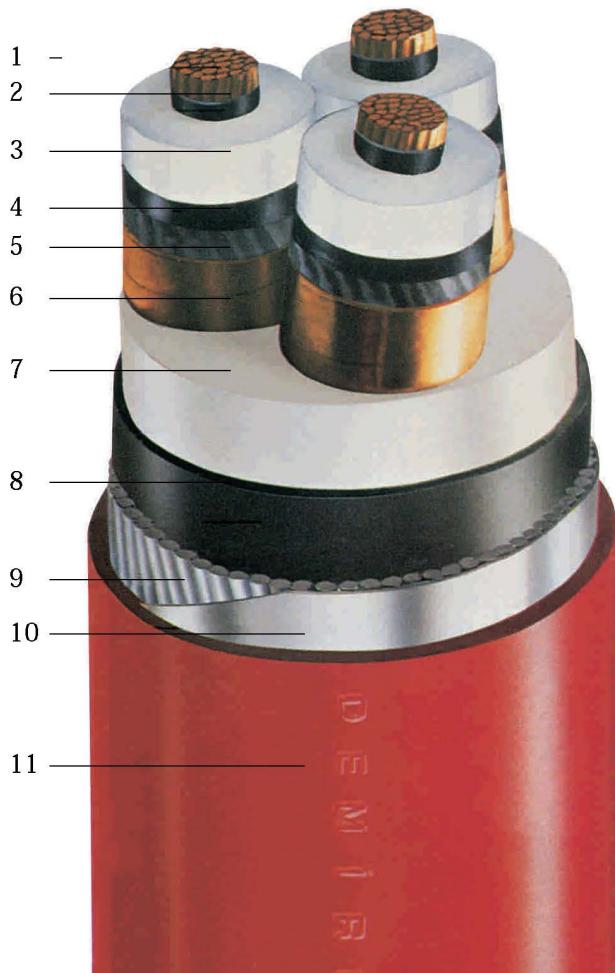

Construction:

- 1-Copper conductor
- 2-Inner semi-conductive layer
- 3-XLPE insulation
- 4-Outer semi-conductive layer
- 5-Semi-conductive tape
- 6-Copper tape screen
- 7-Filling
- 8-PVC separation sheath
- 9-Galvanized round steel wire armour
- 10-Galvanized steel tape helix
- 11-PVC outer sheath

(VDE Code: 2XSEYRGbY)

Application:

Under heavy duty conditions, under ground, in power and switching stations, urban networks, industrial plants, where there is a risk of mechanical damage.

Permissible operating temperature 90°C
Permissible short circuit temperature 250°C
(5 s max. duration)

DIMENSIONS AND WEIGHTS					ELECTRICAL DATA				
Nominal cross-section	Overall diameter approx.	Net weight approx.	Standard delivery length	Delivery reel size	Conductor dc resistance at 20°C (max.)	Operating inductance approx.	Operating capacitance approx.	Current carrying capacity* approx.	
								in ground	in air
mm ²	mm	kg/km	m	cm	ohm/km	mH/km	μF/km	A	A
3x 50/16	81.0	11020	250	221	0.387	0.44	0.13	214	210
3x 70/16	85.0	12320	250	261	0.268	0.41	0.15	261	262
3x 95/16	91.0	14390	250	261	0.193	0.39	0.16	313	319
3x120/16	94.0	15800	250	261	0.153	0.38	0.17	356	364
3x150/25	97.0	17120	250	281	0.124	0.36	0.19	400	418
3x185/25	101.0	19000	250	281	0.0991	0.35	0.20	441	478
3x240/25	107.0	21810	200	281	0.0754	0.34	0.22	510	562

* Please refer to Explanatory Notes.